



# VALID®



## Deposition Aid, Drift Reduction Agent, Antifoaming/Defoaming Agent

VALID® is a non-ionic and shear tolerant drift control agent containing suspended antifoam-defoamer. Valid may be used as a drift control adjuvant to enhance deposition, retention and control spray droplet size of agricultural and industrial chemicals.

### Product Benefits:

- Drift reduction with performance-sized droplets
- Droplet retention by adhesion and spreading
- Contains an antifoam/defoam system
- Low use rates make VALID cost-effective


### Target Chemistries:

- With any spray solutions where a surfactant is not required, and drift control is desired.

### Rate 0.125% v/v.




- Apply 1 jug of Valid to 800 US gallons or 3028 liters of spray solution.

### Flexible Drift Reduction:

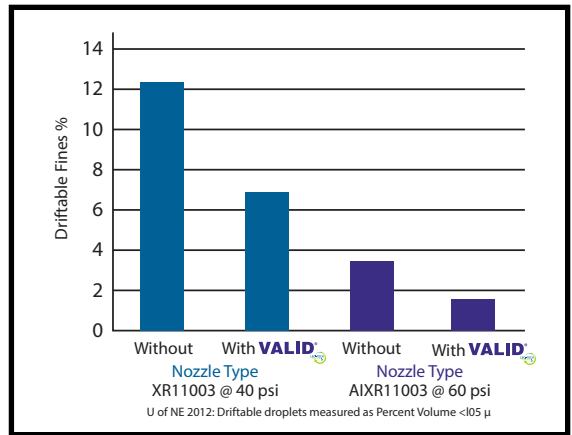

### To the Plant — Drift Reduction with Performance Sized Droplets

TO

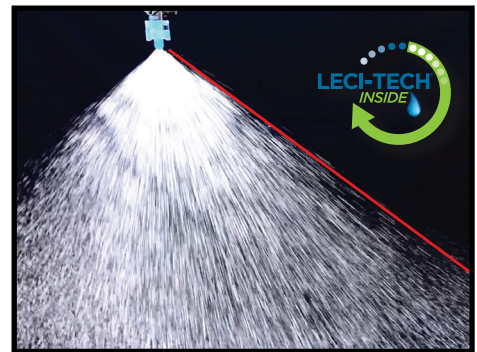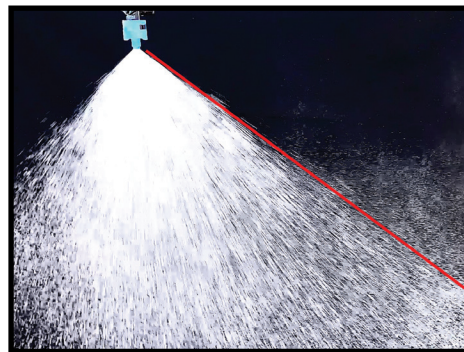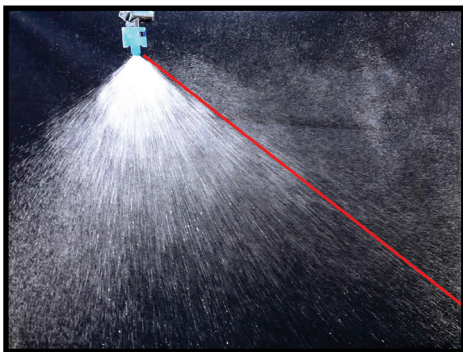

Demonstrates in simulated wind, coarse droplets of; water alone (left), water with glyphosate (middle), and water with glyphosate and Leci-Tech (right).



ALWAYS READ AND FOLLOW LABEL DIRECTIONS.

